


Four-Way Valve V407P Female Pipe four ends

Temperature Range: -40° to +180° F (-40° to +82.2° C)


Part No.	Pipe Thread	L	Flow Dia. D
V407P-4	1/4	3.30	.281

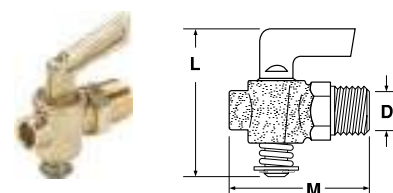

Ground Plug Shutoff DC601

Temperature Range: +32° to +125° F (0° to +51.6° C)


Part No.	Pipe Thread	L	M	Flow Dia. D
DC601-2	1/8	1.90	1.40	.170
DC601-4	1/4	1.90	1.52	.170
DC601-6	3/8	2.26	1.74	.281
DC601-8	1/2	2.29	1.82	.281

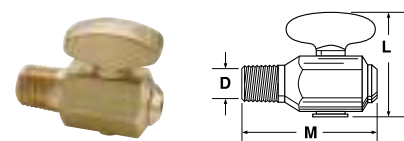

Drain Cock DCR601

Temperature Range: -30° to +250° F (-34.4° to +121.1° C)

Part No.	Pipe Thread	L	M	Flow Dia. D
DCR601-4	1/4	1.39	1.74	.16
DCR601-6	3/8	1.41	1.74	.156

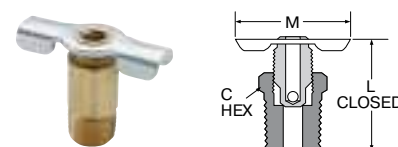

Internal Seal Drain Cock DC602

Temperature Range: -65° to +250° F (-53.8° to +121.1° C)

Part No.	Pipe Thread	C Hex	L	M
DC602-2	1/8	13/32	.92	1.25
DC602-4	1/4	9/16	.94	1.25



WARNING

This product can expose you to chemicals including Nickel which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov